

Immersible Transducers




Convert your Tank into an Ultrasonic Cleaning System



- Frequencies Available
25, 40, 68, 132, 170 kHz
- High Efficiency Vibra-bar® Transducers
- Heavy Duty 316L Stainless Steel
- Heli-arc Welded
- Pressure Tested
- Installation Hardware Included
- Custom Sizes and Mounting Available
- Match with a 5300 or 5400 Generator

Ultrasonic Immersible Mounting Configurations

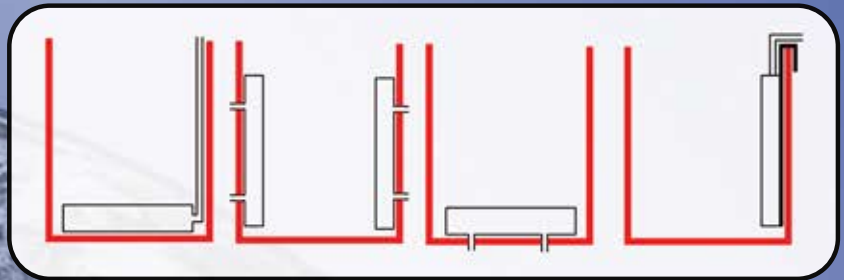

Bottom Mount
with Flex Cable

Double Bulkhead
Opposing Side
Mount

Double Bulkhead
Bottom Mount

Wall Hanger
Side Mount

Model	W x L x D (in)	W x L x D (mm)	Power
UPI 812	8 x 12 x 3"	203 x 305 x 76 mm	500W
UPI 517	5 x 17.5 x 3"	127 x 445 x 76 mm	500W
UPI 1214	12 x 14.5 x 3"	305 x 369 x 76 mm	1000W
UPI 628	6 x 28 x 3"	152 x 711 x 76 mm	1000W

Standard
Immersible
Sizes

* 25 kHz requires thickness to be 4" (102 mm)



ULTRASONIC **POWER**
CORPORATION

"Our technology, your solution"

239 E. Stephenson Street Freeport, IL USA 61032
815-235-6020 • 800-575-0168 • FAX 815-235-6059
WWW.UPCORP.COM • sonic @ upcorp.com

